

# Xtra-Power-Li-ion Battery Individual Data Sheets

---

## 1. Preface

The purpose of this product specification is to provide technical information for the rechargeable Lithium-ion cylindrical battery ICR18650UL, manufactured and supplied by Xtra-power.

## 2. Description and Model

2.1 Description Rechargeable Lithium-ion cylindrical battery

2.2 Model ICR18650UL

## 3. Specification

3.1 Capacity Nominal 1800mAh

Typical 1850mAh

3.2 Charging Voltage 4.20V

3.3 Nominal Voltage 3.7V at 0.2C<sub>5</sub> mA

3.4 Standard Charging Method Constant current:18mA Constant voltage 4.20V

3.5 Cut-off Discharge Voltage 3.00V

3.6 Max.Discharge Current 3600mA

3.7 Max.Charge Current 1800mA

3.8 Cycle Life >500 cycles at 0.5C mA discharge

3.9 Ambient Temperature

for Standard Charge 0°C ~ 45°C

for Discharge -20°C ~ 60°C

3.10 Storage

for within the temperature -20°C ~ 60°C

for within the humidity Smaller or equal to 75%

3.11 Energy Density

Wh/L ~300

Wh/Kg ~120

3.12 Weight of Bare Cell ~45.3g

3.13 Charge State Internal Impedance <80mΩ

## 4.Appearance

Appearance shall be free from any remarkable scratch,flaws, rust, discoloration or electrolyte leakage(visible or by smell)

## 5.Standard Test condition

### 5.1 Environment Conditions

Unless otherwise specified,all test stated in this Product Specification are conducted within the temperature 15~25°C and the humidity 45~85%RH.

---

## Xtra-Power-Li-ion Battery Individual Data Sheets

---

### 5.2 Test Equipment

#### (1) Impedance meter

The impedance meter with AC 1kHz should be used

### 6.Test Procedure and Its Standard

Item	Measureing Procedure	Standard
6.1 Appearance	Visual	No Defect and Leak
6.2 Dimension	Caliper	As item 8
6.3 Weight	Scale	As item 3.12
6.4 Maximum Charge Current	CCCV(Constant Current Constant Voltage)	2000 mA
6.5 Full charge	CCCV	CC-0.2C <sub>5</sub> mA CV- 4.2V End-Current 10mA
6.6 Open Circuit Voltage	Within 1hr after full charge,measure Open circuit voltage	>4.15V
6.7 Internal Impedance	Measure the battery with 1kHz AC	<80mΩ
6.8 Discharge Capacity	Within 1hr after full charge,discharge until final discharge,at 0.2C mA and measure the capacity	>3600mAh
6.9 Maximum Discharge Current	Until final discharge voltage	1800mA
6.10 Charge/Discharge Cycle Life	Charge:CCCV,CC- 0.5CmA,CV- 4.2V End-Current 6mA  Discharge:0.5CmA to 3.00V,This charge/discharge shall be repeated 500 times	Discharge capacity  should be >70% of item 6.8
6.11 Leakage Proof	After full charging,the battery shall be stored at 40±2℃ and humidity 80±5%for 21 days	No leakage should be observed by visual inspection
6.12 Temperature Characteristics	1)After full charge at 20±5℃ ,stand at -20±2℃ for 18h,then discharge at 0.2C mA and measure the capacity 2)After full charge at 20±5℃ ,stand at 55±2℃ for 2hrs ,then discharge at 1C <sub>5</sub> mA and measure the capacity	Discharge capacity should be>60% of item 6.8 and no abnormality on its appearance and stucture
6.13 Charge Retension	After full charging,stand at 20±5℃ for 28 days,measure the discharge capacity according to item 6.8	Discharge capacity should be>85% of item 6.8


# Xtra-Power-Li-ion Battery Individual Data Sheets

## Charge/Discharge Characteristics

Charge :CC/CC4.2V, 360mA(0.2C)\*8hrs,

Discharge :1000mA(0.5C)

Cute-off at 3.00V

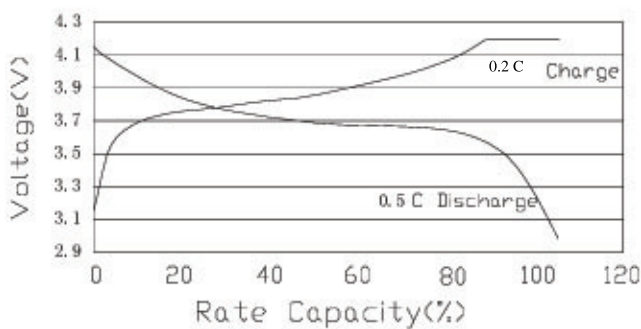


## Temperature Characteristics

Charge :CC/CV 4.2V, 0.2CmA\*8hrs

End Current 10mA

Discharge: 0.5CmA , Cutoff at 3.00V

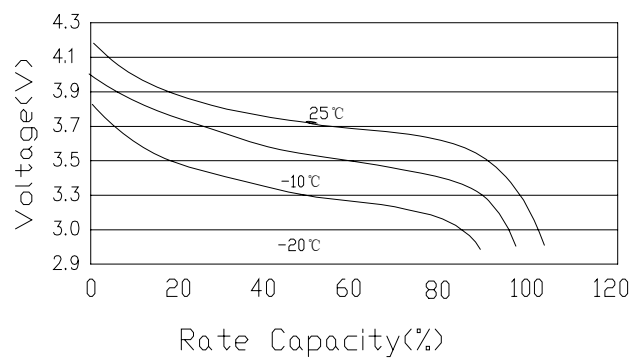


## Charge/Discharge Cycle Life

Charge : CC/CV 4.2 V, 0.5CA,0.5CA\*8hrs

Discharge :0.5CA, Cut-off at 3.00V

Temperature :25°C

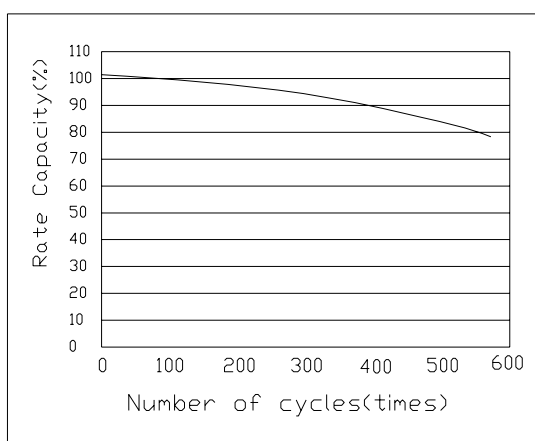

## 8.Dimension (Bare Cell) mm

